


# EXISTING POLY-CRETE HF CEMENTITIOUS URETHANE TO NEW POLY-CRETE HF CEMENTITIOUS URETHANE

New Cementitious  
Urethane Flooring Grade

Typical Keyway  
0.5" x 0.5" ( 12 mm x 12 mm)

Clean Saw Cut

Old Cementitious  
Urethane Flooring Grade

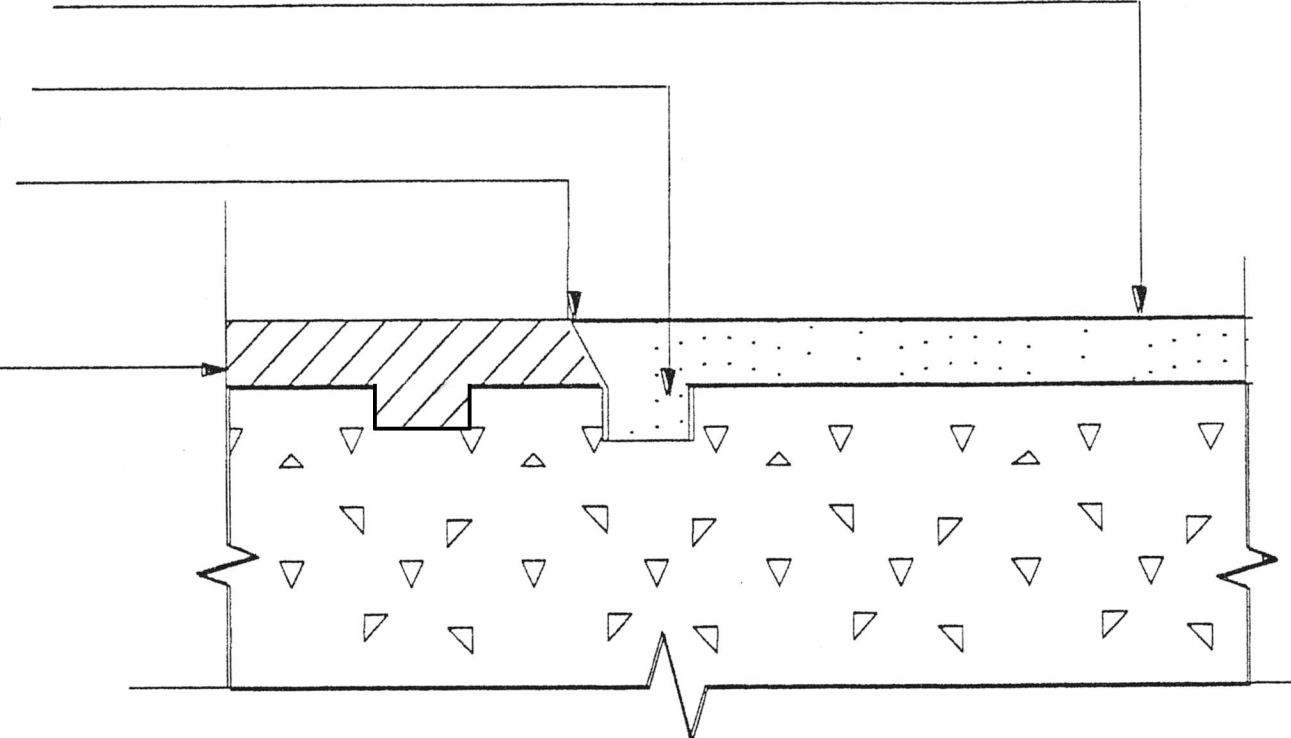

REV. DATE: 7/04  
SCALE: N.T.S.

(C)1999 DUR-A-FLEX, INC. ALL RIGHTS RESERVED. THE RIGHT TO UTILIZE DUR-A-FLEX DETAILS FOR COMMERCIAL PURPOSES IS GRANTED EXCLUSIVELY TO CONTRACTORS, ARCHITECTS, QUANTITY SURVEYORS, ENGINEERS, AND SPECIFICATIONS WRITERS. DUR-A-FLEX(R) AND CRYL-A-FLEX(R) ARE REGISTERED TRADEMARKS OF DUR-A-FLEX, INC. US & FOREIGN PATENT & TRADEMARK OFFICES. MARCA REGISTRADA. ALL OTHER TRADEMARKS ARE PROPERTY OF THEIR RESPECTIVE COMPANIES.