


CEMENTITIOUS URETHANE FLOORING

1/3 DEPTH OF SLAB  
OR 1-1/2" (38mm)

RIGID PATCH MATERIAL

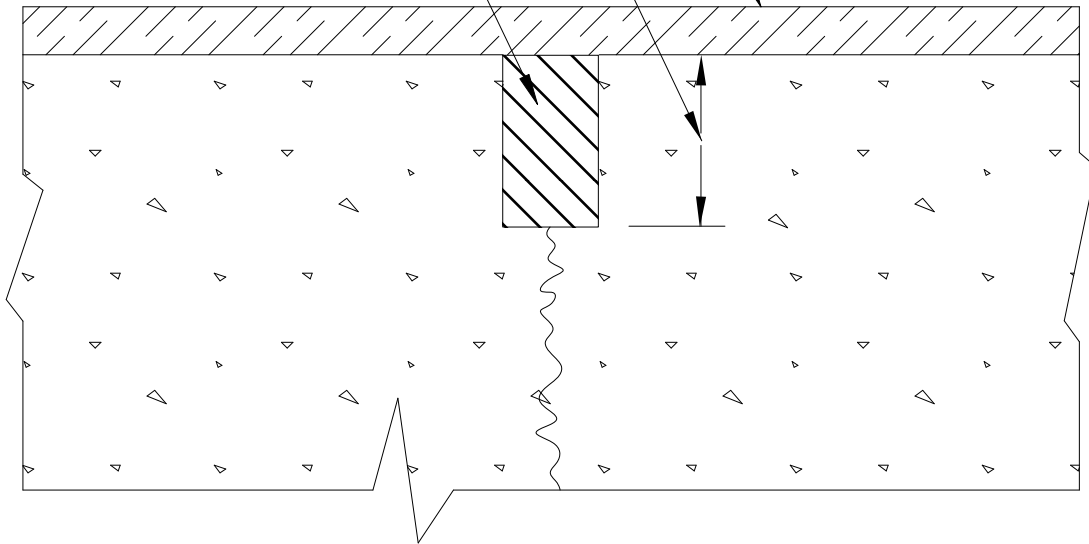

**DUR-A-FLEX**  
INNOVATION FROM THE FLOOR UP

[www.dur-a-flex.com](http://www.dur-a-flex.com)

**860-528-9838**

TITLE

**POLY-CRETE SLB**

CONTROL JOINT DETAIL (NO MOVEMENT)

DATE

10 / 11

SCALE

AS NOTED

DWG NO.

**PCSL-4**

PROJECT