


CEMENTITIOUS URETHANE FLOORING

1/3 DEPTH OF SLAB
OR 1-1/2" (38mm) MIN

FLEXIBLE JOINT SEALANT

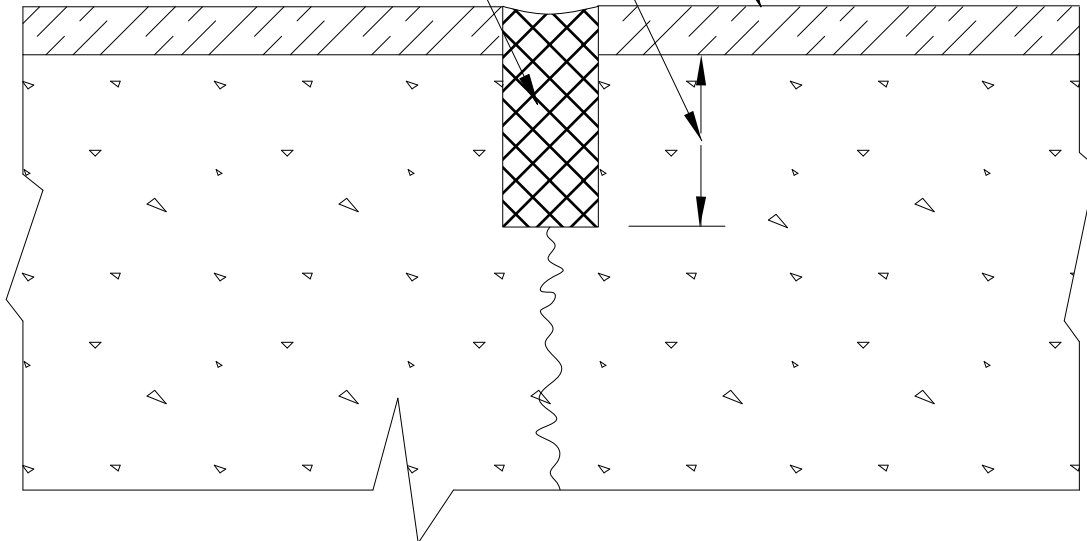

DUR-A-FLEX
INNOVATION FROM THE FLOOR UP

www.dur-a-flex.com

860-528-9838

TITLE

POLY-CRETE SLB

CONTROL JOINT DETAIL (MOVEMENT)

DATE

10 / 11

SCALE

AS NOTED

DWG NO.

PCSL-5

PROJECT