


FOOD & BEVERAGE

INDUSTRIAL

COMMERCIAL

INSTITUTIONAL

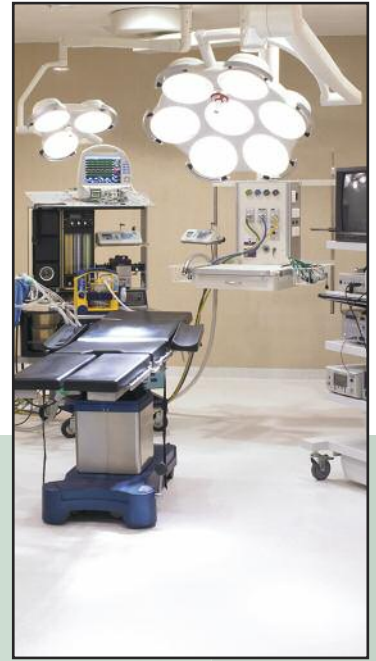

Dur-A-Flex, Inc. is a manufacturer of industrial and commercial floor & wall systems with 50 years of recognition in many industries such as food & beverage, pharmaceutical, healthcare, retail, general industrial among others.

Dur-A-Flex is committed to customer satisfaction through quality and continuous improvement initiatives. Therefore, we invest in:

- Foodservice
- Supermarkets/Retail
- Healthcare
- Education
- Manufacturing
- Pharmaceutical
- Hospitality

- research and development of new technologies
- quality management systems
- compliance with relevant regulatory standards
- training programs for our network of installers (pictured on right)
- technical assistance for the installation of our flooring systems

SEAMLESS FLOOR & WALL SYSTEMS



Contact Dur-A-Flex today!






DUR-A-FLEX
INNOVATION FROM THE FLOOR UP

860-528-9838
contact_us@dur-a-flex.com

Floor and Wall Systems

Dur-A-Flex systems allow quick installation, are easy to clean and offer high impact, wear and chemical resistance. In addition, Dur-A-Flex systems comply with environmental and other applicable regulations, such as CA 01350, for safety and hygienic environments.

Systems






	Dur-A-Flex (Epoxy)	Poly-Crete (Urethane)	Hybri-Flex (Hybrid)	Fast Curing	
					
Description	Epoxy-based systems recommended for industrial and decorative applications. Withstands chemical spills, heavy equipment, continuous traffic and humid environments.	Urethane-based systems recommended for food processing areas and/or areas exposed to chemical attack, impact, high temperatures and thermal shocks.	High performance floors that combine the properties of more than one Dur-A-Flex system. They provide an attractive decorative finish, while resisting high levels of moisture in the concrete.	Systems with ultra fast curing are ideal for operational areas that cannot afford downtimes. Perfect for outdoor areas (UV resistance) and cold rooms (low temp cure).	
Appearance	Decorative and/or Industrial	Industrial	Decorative and/or Industrial	Cryl-A-Flex (MMA) Dec. &/or Indust.	Accelera® Dec. &/or Indust.
Cure Time @ 70°F (21°C)	8 - 14 hours	8 - 14 hours	8 - 14 hours	45 - 60 min.	2 hours
Restart Operations	3 - 5 days	1 - 3 days	3 days	1 day	1 - 2 days
Temp. Installation	60°F - 90°F (15°C - 32°C)	60°F - 85°F (15°C - 29°C)	60°F - 85°F (15°C - 29°C)	0°F - 90°F (-17°C - 32°C)	60°F - 85°F (15°C - 29°C)
Heat Tolerance	Medium	High	Medium	Medium	Medium
UV Resistance	No (Use UV Res. Topcoat)	No (Use UV Res. Topcoat)	Excellent	Excellent	Excellent
Thickness (nominal)	20 mils - 1/4" (0.5 - 6 mm)	1/8" - 1/4" (3 - 6 mm)	3/16" - 1/4" (4 - 6 mm)	1/16" - 1/4" (1.6 - 6 mm)	1/8" - 1/4" (3 - 6 mm)

• For more information, refer to product data sheets currently on www.dur-a-flex.com.



CA 01350
COMPLIANT







Floor Finish

Solid	
Chip	
Quartz	
Mica	
ReFLEXions	

Colors



Floor Textures

	With Aggregate	Without Aggregate
Smooth		
Orange Peel		
Standard		

Visit www.dur-a-flex.com



Literature

- Color Charts
- Product Data Sheets
- Case Studies

Training

- Installer Training Request Form
- Training Videos
- Application Guide by Market Segment

Distribution Centers

Locations

- East Hartford, Connecticut
- Ontario, California
- Chicago, Illinois

Call an area representative

For technical questions and detailed specification of an appropriate system, consult a representative.

