


SHOP FLOOR™

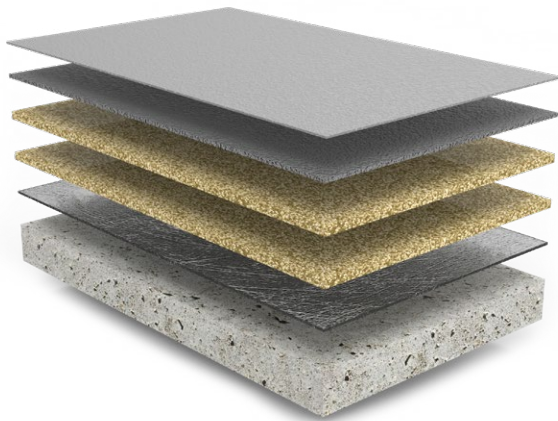

- **Topcoat** – Pigmented Armor Top
- **Grout Coat** – Pigmented Shop Floor
- **Second Broadcast Coat** - Pigmented Shop Floor with broadcast of flintshot aggregate
- **First Broadcast Coat** – Pigmented Shop Floor with broadcast of flintshot aggregate
- **Primer** – Dur-A-Shield, Dur-A-Glaze WB Primer, Dur-A-Glaze MVP, or Elast-O-Coat
- **Prepared Substrate** – Concrete Surface Profile (CSP) of 2-3

SYSTEM OVERVIEW

Shop Floor™ is a seamless, slip resistant pigmented flooring system with a nominal 1/8" (when using double broadcast method) thickness consisting of 100% solids epoxy and natural quartz aggregates. It is ideal for industrial flooring applications and features a chemical, UV, and wear-resistant urethane topcoat.

FEATURES & BENEFITS

• Heavy Duty

Highly abrasion resistant, and designed for constant foot/vehicle traffic

• UV Stable

Years of service with no ambering or degradation due to UV exposure

• Non Slip

Textured finishes aid in a safer floor, even when wet

• Variable Install Window

Coat over new or old concrete

COMMON USE SITES


- Manufacturing
- Loading Docks
- Tool Cribs
- Mechanical Rooms
- Server Rooms
- Data Centers



COLORS

Available in a selection of pre-pigmented options. For a full list of available colors visit DUR-A-FLEX.COM.

STANDARD COLORS

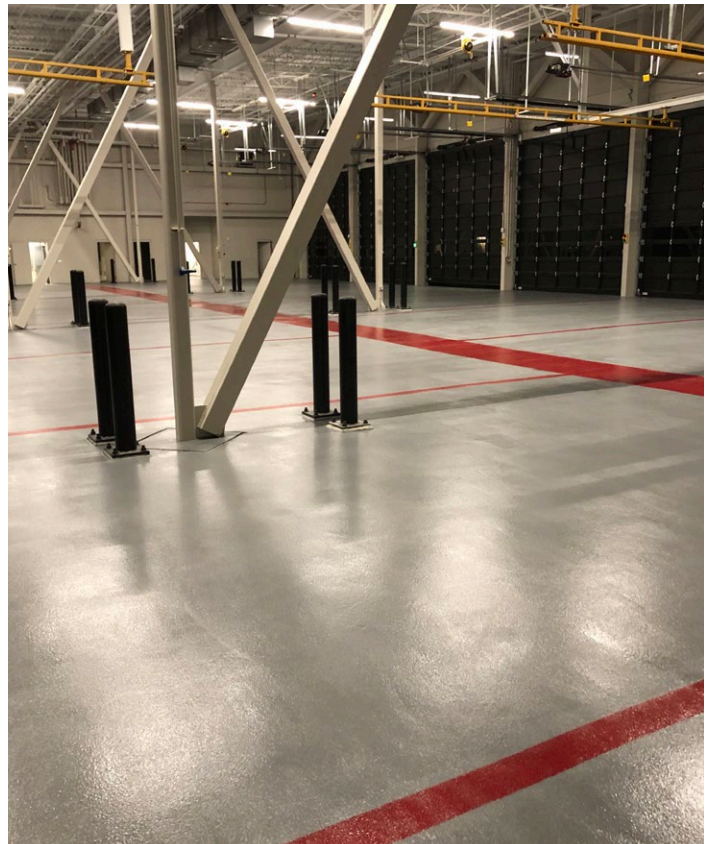

IMPORTANT!

Before using DUR-A-FLEX products, read and understand its accompanying Safety Data Sheet & Application Instructions for important safety information.

STANDARD TERMS AND CONDITIONS OF SALE, INCLUDING STANDARD WARRANTY APPLY - VISIT DUR-A-FLEX.COM FOR THE LATEST VERSION

v1