
DUR-A-GARD® SL



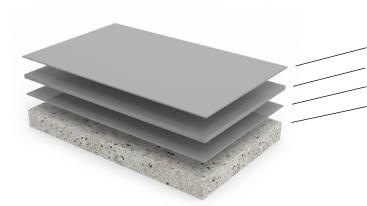

Topcoat - Pigmented Armor Top (Variable Textures Available with Additives) **Body Coat -** Dur-A-Gard SL (Applied at 60 or 100 mil)

Primer - Dur-A-Glaze #4, Dur-A-Glaze WB, Dur-A-Glaze MVP*

Prepared Substrate - Concrete Surface Profile (CSP) of 3-4

*Dur-A-Glaze MVP Primers include any available version of Dur-A-Glaze MVP Primer.

SYSTEM OVERVIEW

DUR-A-GARD SL is a solid-color, self-leveling seamless flooring system consisting of 100% solids epoxy and a special blend of natural quartz aggregates and fillers. This system can be applied at variable thicknesses from 60 - 100 mils. Virtually unaffected by oil, grease, gasoline, strong detergents, salts, etc., Dur-A-Gard SL protects new concrete floors from industrial abuse as well as restores damaged concrete to better-than-new condition.

FEATURES & BENEFITS

· Stain Resistant

Reduces discoloration caused by common chemicals and cleaners

· Variable Build

Achieves self-level up to 100 mil

· Abrasion Resistant

Performance topcoat delivers superior toughness

· Easy Maintenance

Long-lasting performance and gloss finish without waxing

COMMON USE SITES

- Pharmaceutical Facilities
- Clean Rooms
- Assembly Areas
- Laboratories
- Light Manufacturing





COLORS

Available in a selection of pre-pigmented options. For a full list of available colors visit **DUR-A-FLEX.COM**.

STANDARD COLORS





[†] Not available in Dur-A-Glaze #4 Field Pigment Packs





IMPORTANT!

Before using DUR-A-FLEX products, read and understand its accompanying Safety Data Sheet & Application Instructions for important safety information.

STANDARD TERMS AND CONDITIONS OF SALE, INCLUDING STANDARD WARRANTY APPLY - VISIT **DUR-A-FLEX.COM** FOR THE LATEST VERSION





^{*}Not available in MMA

^{**}Not available in Shop Floor