


HYBRI-FLEX® ES

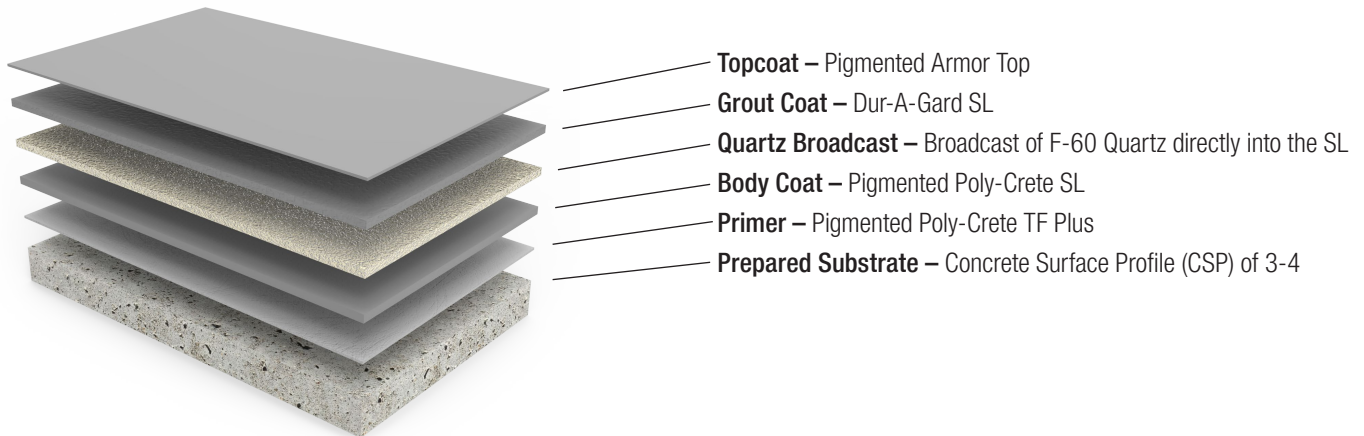

SYSTEM OVERVIEW

HYBRI-FLEX® ES is a solid color, hybrid floor system consisting of our cementitious urethane base coat and self-level epoxy and urethane topcoats. It features a smooth finish and our ultra-tough Armor-Top topcoat. The nominal system thickness is 3/16 inch. It is an ideal choice for installation on freshly placed concrete, rough existing floors, or where higher impact resistance is desired.

FEATURES & BENEFITS

• Self-Leveling

A uniform, more even floor system that provides light reflection

• Abrasion Resistance

Armor Top topcoat delivers superior toughness

• Moisture Mitigating

Can be applied to high moisture concrete and is capable of handling high soluble ion (salts) contamination — reducing the risk of moisture related coating failure

• Easy Maintenance

Long-lasting performance and gloss finish without waxing

COMMON USE SITES

- Clean Rooms
- Laboratories
- Light Manufacturing Areas
- Air Craft Hangars / High Bays



COLORS

Available in a selection of pre-pigmented options. For a full list of available colors visit DUR-A-FLEX.COM.

STANDARD COLORS



#Not available in Armor Top

† Not available in Dur-A-Glaze #4 Field Pigment Packs

*Not available in MMA

**Not available in Shop Floor



IMPORTANT!

Before using DUR-A-FLEX products, read and understand its accompanying Safety Data Sheet & Application Instructions for important safety information.

STANDARD TERMS AND CONDITIONS OF SALE, INCLUDING STANDARD WARRANTY APPLY - VISIT DUR-A-FLEX.COM FOR THE LATEST VERSION

210622